

EE65 Series

EE65 air velocity transmitters are ideal for accurate ventilation control applications. They are operating on an innovative hot film anemometer principle.

The E+E thin film sensor guarantees very good accuracy at low air velocity, which is not possible for conventional anemometers with commercial temperature sensors or NTC bead thermistors. Moreover, the E+E sensor is much more inconsitive to dust and dirt than all other

insensitive to dust and dirt than all other anemometer principles. This means high reliability and low maintenance costs.

EE65 series are available with current or voltage output, the measuring range and the response time can be selected with jumpers by the user.

Low angular dependence enables easy, cost-effective installation.

An integrated LC display and a version with remote sensing probe are available.

Air Velocity Transmitter for HVAC Applications





Typical Applications

HVAC process and environmental control

Features

v2.1

low angular dependence easy installation adjustable to application requirements

Technical Data_

Measuring values


buility values					
Working range ¹⁾	010m/s (02000ft/min)				
	015m/s (03000ft/min)				
	020m/s (04000ft/min)				
Output ¹⁾	0 - 10 V	-1 mA < I _L < 1 mA			
	4 - 20 mA	R _L < 450 Ω			
Accuracy at 20 degC (68°F), 45 % RH	010m/s (02000ft/min)	± (0.2m/s / 39.4ft/min + 3 % of m. v.)			
and 1013hPa	015m/s (03000ft/min)	± (0.2m/s / 39.4ft/min+ 3 % of m. v.)			
	020m/s (04000ft/min)	± (0.2m/s / 39.4ft/min+ 3 % of m. v.)			
Response time τ_{90} 1) 2)	typ. 4 sec. or typ. 0.2 sec.	(at constant temperature)			

General


Current consumption for AC supply	max. 150 mA		
for DC supply	max. 90 mA		
Angular dependence	< 3 % of measure	ment at $ \Delta \alpha < 10^{\circ}$	
Cable gland	M16x1.5	cable Ø 4.5 - 10 mm (0.18 - 0.39) inch)
Electrical connection	screw terminals m	nax. 1.5 mm² (AWG 16)	
Electromagnetic compatibility	EN 50081-1		()
	EN 50082-1	EN 50082-2	
Housing/protecting class	Polycarbonat / IP6	65, Nema 4 with LC display I	P40
1) Selectable by jumper			

2) Response time τ_{90} is measured from the beginning of a step change of air velocity to the moment of reaching 90% of the step.

EE65

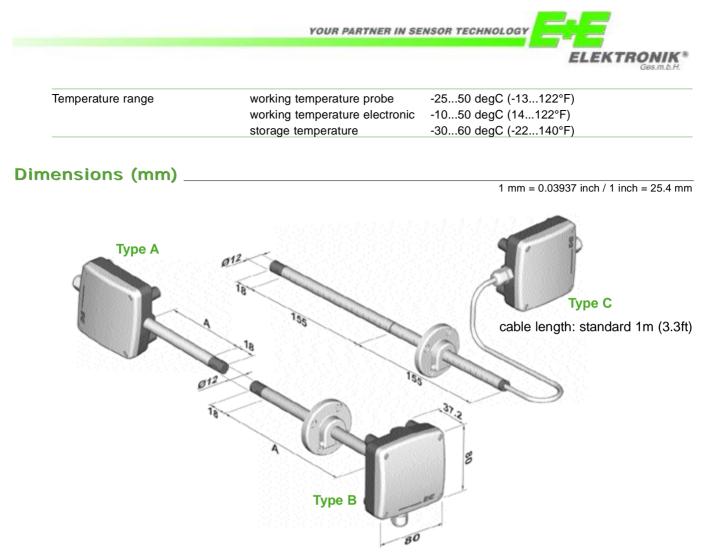

Connection Diagram_



Ordering Guide _____

MODEL		HOUSING		PROBE LENG (according to "A")	TH	CABLE LI (only Type C)	ENGTH	DISPLAY	
velocity	(V)	wall mounting	(A)	100mm (3.9 inch)	(3)	1m (3.3ft)	(no code)	without display	(no code)
		duct mounting	(B)	200mm (7.9 inch)	(5)	2m (6.6ft)	(K200)	with display	(D02)
		seperated sensor probe	(C)	others	(x)	5m (16.4ft)	(K500)		
						10m (32.8ft)	(K1000)		
EE65-									

Order Example_____

EE65-VB5-D02

model: housing: probe length: display: velocity duct mounting 200mm (7.9 inch) with LC display